




PRODUCT SUBMITTAL DATA

DURAMARK™ MEDICAL GAS SELF-STICK PIPE MARKER

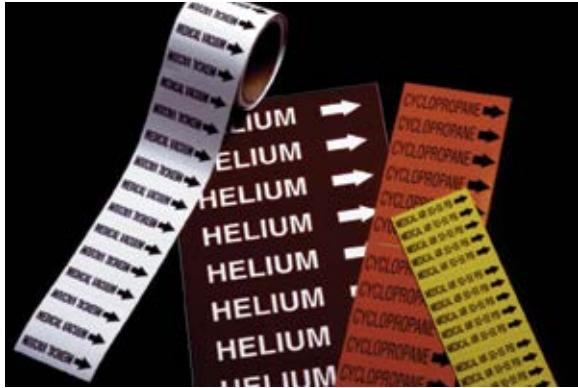

DESCRIPTION: DURAMARK™ is a durable indoor/outdoor pipe marker system for medical piping. Sturdy .004" vinyl printed using UV screen inks which hold up to sun & weather.

USE: Used to identify medical gases as well as identify varying vacuum systems on tubing and piping.

COMPLIANCE: Complies with NFPA-National Fire Protection Association Standard (NFPA 99C-section 4-3.5.4.1) Gas and Vacuum systems. Complies with the CGA-Compressed Gas Association (CGA c-9 section 4.1)

Craftmark's Duramark™ Medical Gas Pipe Markers is an excellent system for marking medical piping. Sturdy 4 mil vinyl is printed with durable UV inks. Markers feature an aggressive acrylic adhesive backing for permanent application to clean dry piping.

FEATURES

- 360° visibility
- Meets NFPA 99C
- Meets CGA C-9
- 360° visibility
- Indoor/outdoor use.
- Rugged UV inks.
- Thick 4 mil vinyl.
- Aggressive acrylic self-stick adhesive.
- Arrows on markers.


•DURAMARK MG Application Guide



STYLE 3
 To Fit 3/8" - 3/4" Pipes
 3 markers per card



ROLL FORM
 To Fit 3/8" - 3/4" Pipes
 60 labels/RL



STYLE 1
 To Fit 2 1/8" - 3" Pipes
 1 marker per card



STYLE 2
 To Fit 1" - 2" Pipes
 2 markers per card

•STANDARD COLORS

- WHITE/GREY
- WHITE/BROWN
- BLACK/YELLOW
- WHITE/GREEN
- WHITE/BLACK
- WHITE/BLUE
- WHITE/PURPLE
- BLACK/WHITE
- BLACK/YELLOW STRIPE
- BLACK/BLACK STRIPE
- BLACK/YELLOW CHECKER BOARD
- BLACK/BLACK CHECKER BOARD
- WHITE/RED

DATE: ___ / ___ / ___ JOB: _____

CONTRACTOR: _____

DURAMARK™ MEDICAL GAS SELF-STICK PIPE MARKER (Continued)

ADHESIVE: Permanent, aggressive acrylic pressure sensitive adhesive. Sticks to most pipe and pipe covering materials.

SURFACE PREPARATION: Surface should be dry, oil free, dirt free and above the minimum application temperature.

SERVICE TEMPERATURE: -40°F to 200°F (-40°C to 93°C)

APPLICATION TEMPERATURE: Minimum application temperature of 50°F (10°C)

AVERAGE OUTDOOR DURABILITY: 5 year outdoor-mid continental U.S.

CHEMICAL RESISTANCE: VERY GOOD

MOISTURE RESISTANCE: EXCELLENT MOISTURE RESISTANCE

ABRASION RESISTANCE: VERY GOOD ABRASION RESISTANCE

GLOSS: 40 Garder unit (20° test)

STORAGE STABILITY: 2 years typical at 70°F (21°C) at 50% relative humidity.

DATE: ___ / ___ / ___

JOB: _____

CONTRACTOR: _____
